(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property **Organization**

International Bureau



(43) International Publication Date 21 April 2005 (21.04.2005)

PCT

(10) International Publication Number WO 2005/035328 A2

(51) International Patent Classification7:

B60T

(21) International Application Number:

PCT/IB2004/003329

(22) International Filing Date: 12 October 2004 (12.10.2004)

(25) Filing Language: English

English

(26) Publication Language:

(30) Priority Data:

10/684,877 13 October 2003 (13.10.2003) US 60/513,085 21 October 2003 (21.10.2003)

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:

US 10/684,877 (CIP)

Filed on

13 October 2003 (13.10.2003)

(71) Applicant: BERI, Michael [CA/CA]; 31 Codsell Avenue, North York, Ontario M3H 3V7 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US (patent), UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

of inventorship (Rule 4.17(iv)) for US only

Published:

without international search report and to be republished upon receipt of that report

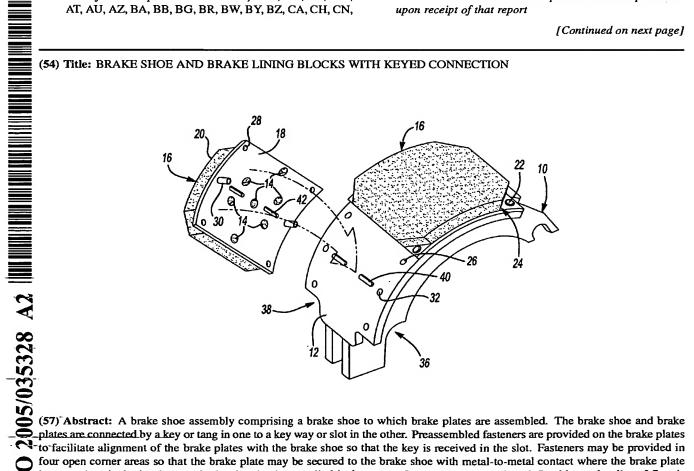

to facilitate alignment of the brake plates with the brake shoe so that the key is received in the slot. Fasteners may be provided in four open corner areas so that the brake plate may be secured to the brake shoe with metal-to-metal contact where the brake plate is secured to the brake shoe. A brake shoe having a cylindrical outer surface or an outer surface defined by a plurality of flats is provided.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.